

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**


Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**

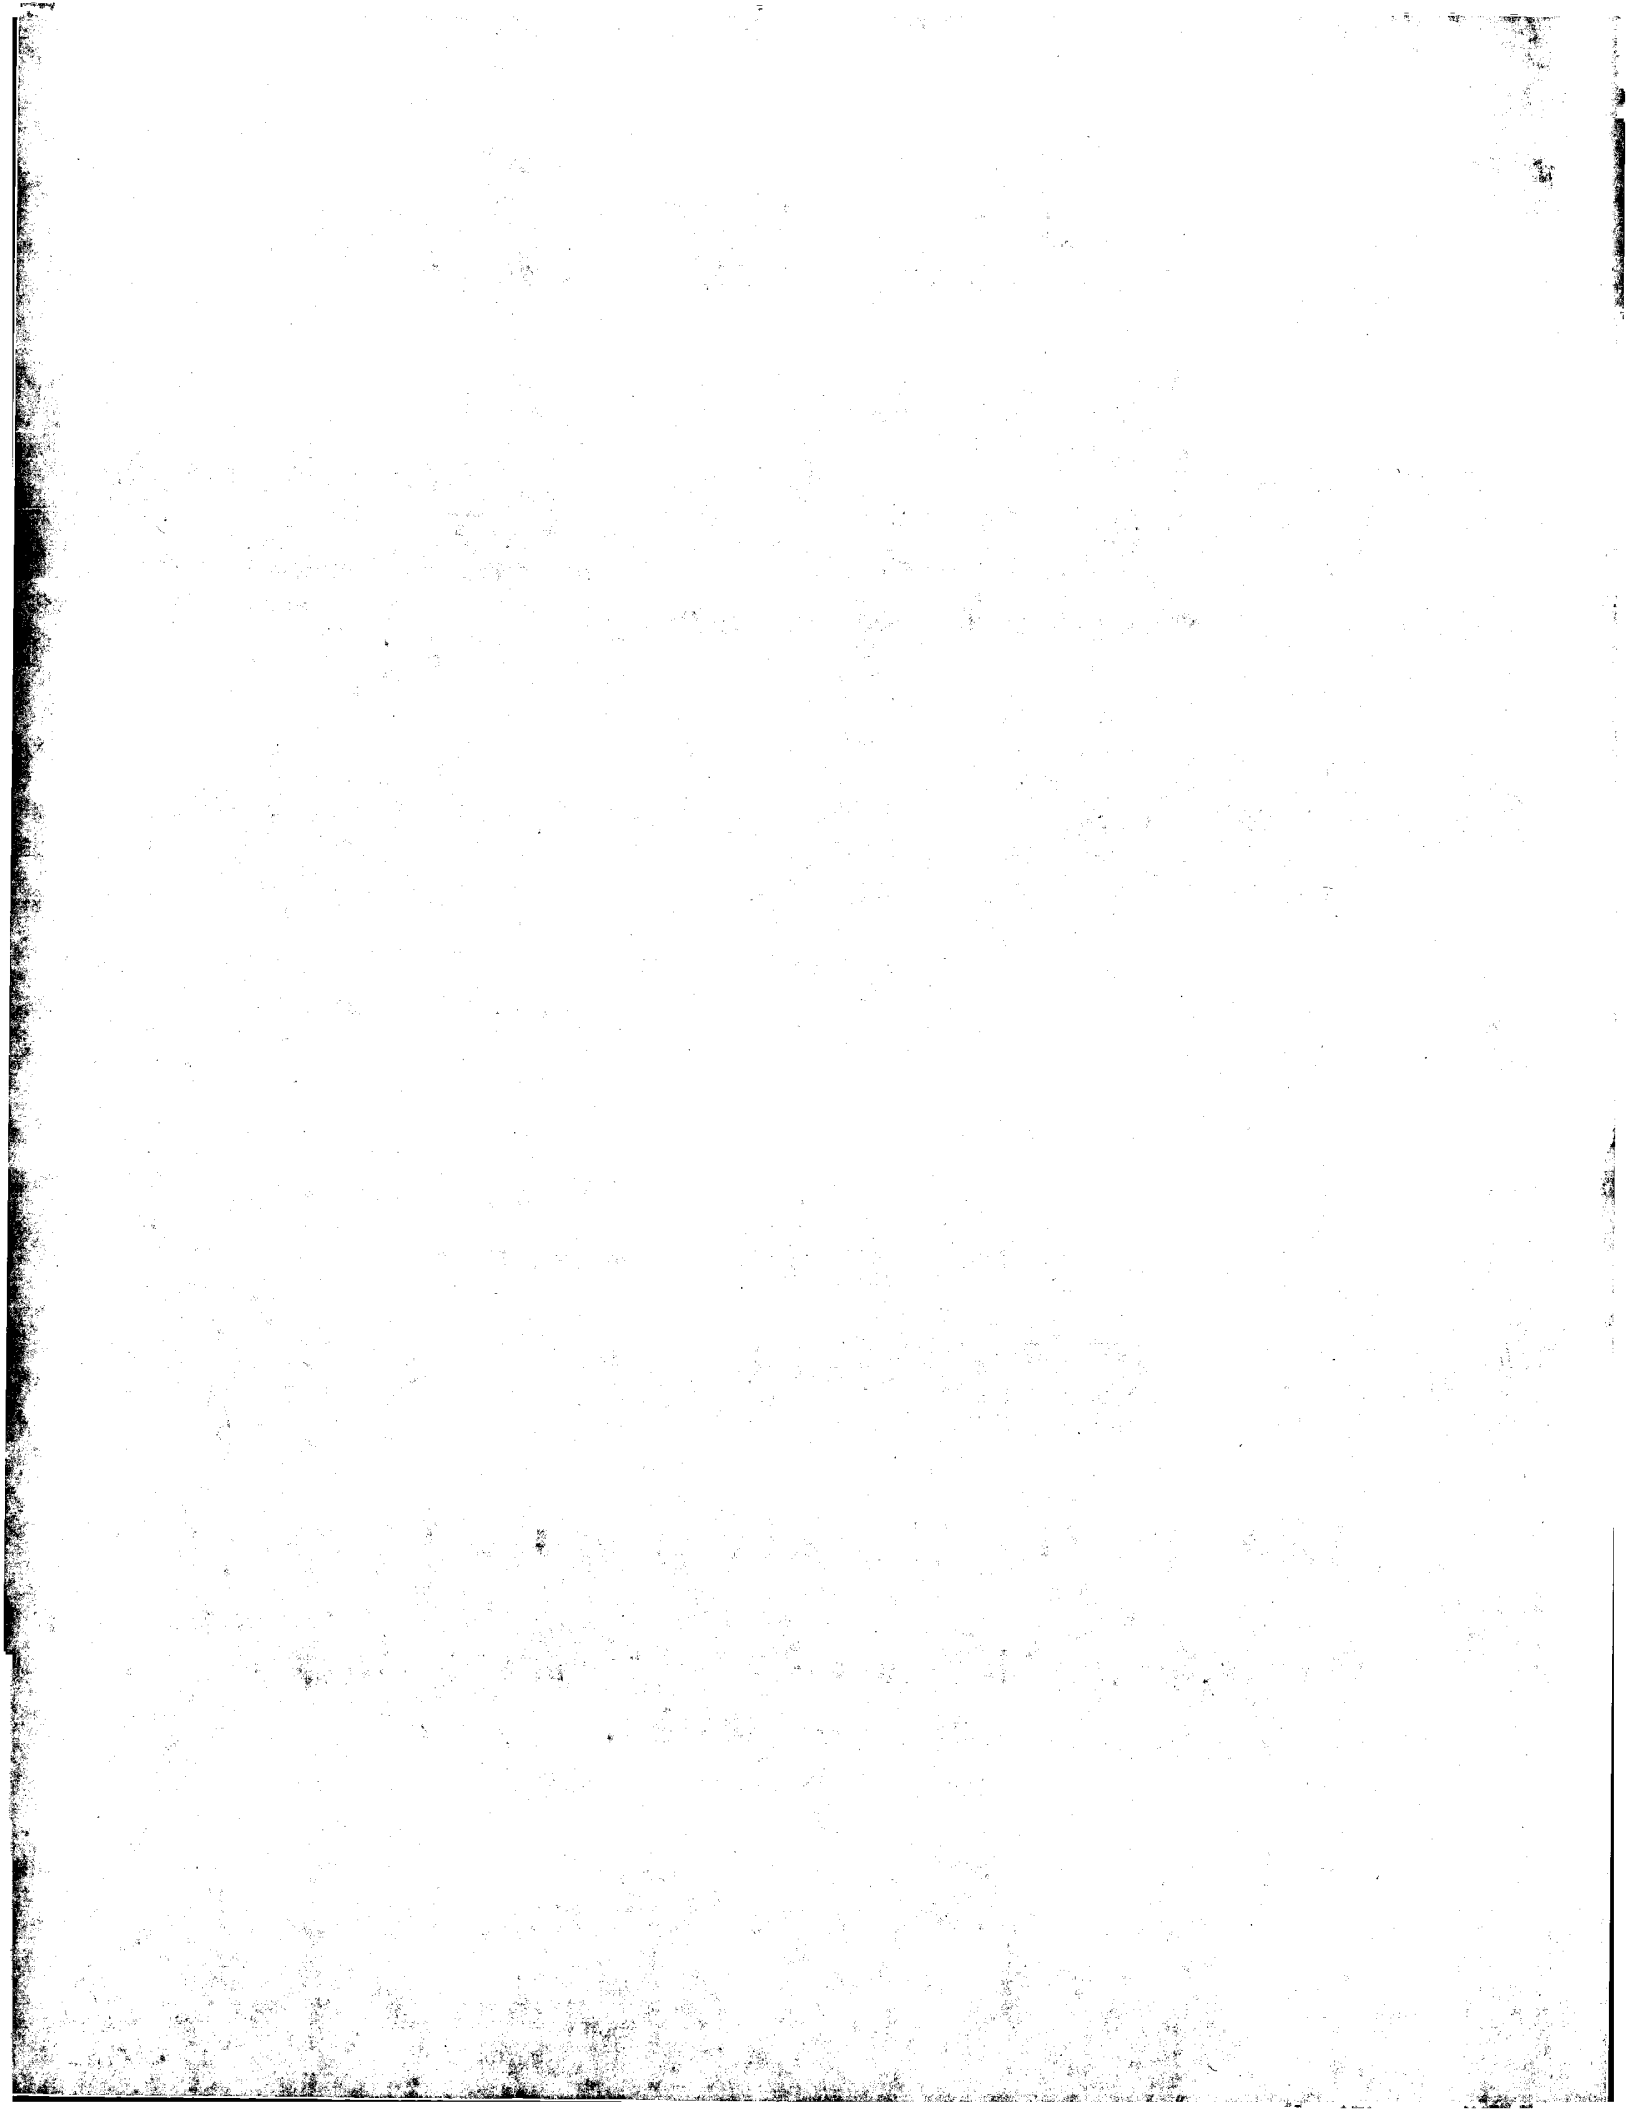



Europäisches  
Patentamt

European  
Patent Office

Office européen  
des brevets

09 30 20 7

PLT/GB CO/C3088

21 NOV 2000

REC'D 21 NOV 2000

WIPO

PCT

Bescheinigung

Certificate

Attestation

Die angehefteten Unterla-  
gen stimmen mit der  
ursprünglich eingereichten  
Fassung der auf dem näch-  
sten Blatt bezeichneten  
europäischen Patentanmel-  
dung überein.

The attached documents  
are exact copies of the  
European patent application  
described on the following  
page, as originally filed.

Les documents fixés à  
cette attestation sont  
conformes à la version  
initialement déposée de  
la demande de brevet  
européen spécifiée à la  
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

99308720.4

**PRIORITY DOCUMENT**  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH  
RULE 17.1(a) OR (b)

Der Präsident des Europäischen Patentamts:  
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets  
p.o.

I.L.C. HATTEN-HECKMAN

DEN HAAG, DEN  
THE HAGUE,  
LA HAYE, LE

20/10/00

100-100000





Europäisches  
Patentamt

European  
Patent Office

Office européen  
des brevets

**Blatt 2 der Bescheinigung**  
**Sheet 2 of the certificate**  
**Page 2 de l'attestation**

Anmeldung Nr.:  
Application no.: 99308720.4  
Demande n°:

Anmeldetag:  
Date of filing: 03/11/99  
Date de dépôt:

Anmelder:  
Applicant(s):  
Demandeur(s):  
**BRITISH TELECOMMUNICATIONS public limited company**  
**London EC1A 7AJ**  
**UNITED KINGDOM**

Bezeichnung der Erfindung:  
Title of the invention:  
Titre de l'invention:  
**Mobile cellular radio**

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s) revendiquée(s)

Staat:  
State:  
Pays:

Tag:  
Date:  
Date:

Aktenzeichen:  
File no.  
Numéro de dépôt:

Internationale Patentklassifikation:  
International Patent classification:  
Classification internationale des brevets:  
**H04B7/185**

Am Anmeldetag benannte Vertragsstaaten:  
Contracting states designated at date of filing: AT/BE/CH/CY/DE/DK/ES/FI/FR/GB/GR/IE/IT/LI/LU/MC/NL/PT/SE  
Etats contractants désignés lors du dépôt:

Bemerkungen:  
Remarks:  
Remarques:



6

7



### Mobile Cellular Radio

This invention relates to cellular radio systems, and in particular to a system for allowing the use of a mobile cellular telephone on board an aircraft or other vehicle when the use of the fixed base stations of a cellular telephone system is  
5 impractical or not permitted.

In a cellular radio system one or more mobile radio telephones may each establish a radio connection with one of a number of fixed radio transceivers, connected to a telephone switching system, and they are thus able to set up and make telephone calls. Arrangements are made such that if the mobile telephone  
10 moves out of range of the fixed radio transceiver, connection with the switching system can be maintained or resumed by a "handover" process, by which the mobile telephone establishes radio contact with another fixed radio transceiver.

It is known to provide cellular radio coverage on board a vehicle such as a railway train using a passive fibre optic network or similar. Connections from several  
15 mobile telephones on board the vehicle are fed to a single repeater antenna on the vehicle, which communicates with the cellular radio fixed base station nearest to the vehicle. Handover from one fixed base station to another is controlled for all mobile units together by a vehicle-borne repeater unit. This system reduces signalling overload when several mobile units on the vehicle enter a new cell at the same time,  
20 possibly at high speed. However, as the repeater co-operates with the fixed base transceivers of the cellular system, it cannot be used outside the range of such transceivers.

There would be a number of practical difficulties in using a standard cellular telephone in the air. Firstly, although reliable handover of a mobile unit can be  
25 achieved from moving vehicles travelling at speeds of up to 200km/h, a typical passenger aircraft travels at speeds approaching 1000 km/h. Moreover, frequency re-use patterns, which allow several base stations to use the same radio frequencies without interference, are designed on the assumption that a mobile unit served by one base station is not able to exchange radio signals with other base stations using  
30 the same frequency. This assumption ceases to be valid if the mobile unit is several thousand metres above the ground, as it will be in line-of-sight of a large number of base stations simultaneously. In fact, many cellular base stations have antennas arranged for maximum gain in the horizontal plane, so an airborne cellular telephone

may in fact be unable to obtain a signal from any base station, even though a large number of them are in line-of-sight.

For truly global coverage, satellite telephones are available. However, these are expensive, and much heavier than a cellular telephone. They are therefore only  
5 preferred by users who frequently need to make or receive calls when out of range of the cellular network.

The use of portable radio telephones on board aircraft is discouraged, and in many cases forbidden, because of the perceived potential for interference with the aircraft's own electronic systems. Some airline operators provide special telephone  
10 facilities on board their aircraft, such as the service provided to several airlines by the applicant company under the Registered Trade Mark "Skyphone". This service uses onboard terminals connected, through a satellite link between the aircraft and a ground station, to the telephone network. Another system, TFTS (terrestrial flight telephony system, marketed as "Jetphone"), operates in a similar manner, but uses a  
15 direct link between the aircraft and a ground station, without a satellite link. However payment for these services is generally at the point of use (or prepaid), and may be in a foreign currency. Calls made to the user's cellular telephone will not be successful unless the calls can be diverted to the telephone number of the onboard user terminal (which will generally not be known to the caller), and any special  
20 facilities offered by the user's cellular network will in general be unavailable.

Through "roaming" agreements between network operators, a user can use his cellular telephone to make and receive calls in many different countries. If it were possible, a user with his own cellular telephone account would therefore prefer to continue to use his cellular telephone subscription when travelling within or between  
25 these countries on board an aircraft or other vehicle.

This is made possible by an invention disclosed in European Patent Application 99307279.2, filed by the applicant company on September 14<sup>th</sup> 1999, which provides apparatus for enabling a termination point of a first telecommunications system to initiate call diversion instructions in the switching  
30 system of a second telecommunications system such that calls initially directed to a telephone apparatus usable with the second telecommunications system are diverted to the said termination point in the first telecommunications system, the apparatus



comprising means in the first telecommunications system for identifying the telephone apparatus from which calls are to be diverted and the termination point to which calls are to be diverted, and an interface means between the first telecommunications system and the switching system of the second  
5 telecommunications system, the interface means comprising:

means to indicate to the switching system that the telephone apparatus is in a specified operating condition, irrespective of the true operating condition of the telephone apparatus,

and means to generate an instruction to the switching system to divert calls,  
10 intended for the telephone apparatus, to the said termination point of the first telecommunications system when the telephone apparatus is indicated as being in the said predetermined operating condition.

In the preferred arrangement the first and second telecommunications systems are a satellite telephone system and a cellular telephone system respectively,  
15 the identification information being a user identity associated with the telephone apparatus, and the network address of the termination point.

Other aspects of the invention disclosed in the aforementioned European patent application provide the novel features of each of the individual telecommunications systems which co-operate to form the complete system, and  
20 methods of operation of these individual co-operating systems and of the complete process.

In the cellular telephone system described in the aforementioned European Patent application the interface unit is arranged to appear to the switching system as a typical radio base station control system, to which the mobile handset is currently  
25 working, although in fact no radio base stations are actually controlled by it. This interface unit may therefore be considered to be a "Virtual" Base Site Controller. The switching system itself requires no modification: it merely registers that the user is working to the "Virtual" Base Site Controller and stores the user details in its "Visitor Location Register" (VLR), in the same way as it would for a mobile unit working to  
30 any real base site controller to which it is connected. The interface unit also generates a call diversion instruction, which will appear to the switching system to have come from the mobile handset, by way of the "Virtual" Base Site Controller.

This call diversion instruction is set up in the switching system such that if the "Virtual" Base Site Controller responds to a call request directed to the mobile unit with a "busy line" response (or some other specified condition), calls are to be diverted, through normal network interconnects, to a specified directory number, namely that of the satellite termination point to which the user is connected. The interface unit does not in fact monitor the real condition of the user terminal, (which is not operatively connected to the interface unit), but instead always returns the "line busy" signal to the switching system.

The interface unit includes a store to record any diversion settings existing for the telephone apparatus prior to the diversion to the second network being set up. This allows these settings to be retrieved when the user disconnects from the first telecommunications system, so that they can be reinstated in the switching system of the second telecommunications system, or transferred to another telecommunications system, when the telephone apparatus makes contact with a real radio base station, thereby initiating a handover procedure from the "Virtual" Base Site Controller to the real one.

Should a second call attempt to the user's cellular telephone be made whilst a call is in progress to the onboard system, the switching system may be arranged to divert it to another predetermined number, such as the user's "voicemail", or automatic answering service, address.

If the user termination is in an aircraft or other vehicle connected to a ground station (by satellite or otherwise), it may move from the area covered by one satellite (or ground station) to that of another. In that case, the network address of the termination changes. To accommodate this, the interface may be provided with means to store the address of termination points in the first system, means to record changes to the said addresses transmitted to it from the first system, and means to modify the diversion instruction in the switching system when such a change takes place. Alternatively, the termination point may be arranged simply to repeat the set-up process, causing the mobile unit to be re-registered with the interface unit, (which will not be apparent to the switching system, as it will perceive the same "virtual" base site controller), and to transmit a new call divert instruction to the revised address of the termination point.

The telecommunications termination point may be provided with reading apparatus for reading an information carrier encoded with the user's identity. Such apparatus is commonly used for telephone terminals to which the public has access to allow calls to be charged to a user's credit card account, or an account with the service provider, or to deduct value from a stored value on the card.

In those cellular systems where the user identity is carried on a data carrier card transferable between telephone handsets, the reading apparatus may be arranged to read this carrier. In the "GSM" standard these cards are known as "Subscriber Identity Modules" or SIMs, and are either of standard credit card size (86mm x 54 mm) or rather smaller (14mm x 25mm), and may be transferred from one cellular telephone handset to another to allow the same telephone user account and directory number to be used with different handsets.

The onboard user terminal may be arranged to co-operate with the complete cellular telephone. Although this requires a more complex interface between the cellular telephone and the user terminal, it allows the user to use the functionality of his own telephone, rather than having to familiarise himself with that of an unfamiliar satellite user terminal.

However, standard on-board satellite telephone card readers may not be compatible with GSM "SIMs", or complete telephones. To avoid the need to modify the user terminals, a user identity may be carried on a special carrier compatible with the existing card readers. This user identity may be the user's cellular radio network identity (IMSI), or some other identity from which it can be derived.

Provision of ringing tone to the handset may be annoying to other passengers, or may not be noticed by the user if he is using the headphones of an in-flight entertainment system. In any case, as the airborne telephone system was initially designed for making outgoing calls only, the handsets on some existing on-board telephone equipment may not necessarily be provided with a conventional call alerting device.

According to a first aspect, the present invention provides telecommunications apparatus for answering telephone calls, the apparatus comprising:

detection means for detecting a call signal indicative of an incoming call attempt to a telecommunications termination point,

an information display system for providing information and entertainment services to a user, the information display system comprising

a display means and

a server for selecting information and controlling the display means to display  
5 the selected information;

the server having means responsive to the detection means for causing the display apparatus to display a call alert indication.

According to a second aspect, the invention provides a method of alerting a user of a telecommunications termination point to an incoming call attempt,  
10 wherein on detection of a call signal indicative of an incoming call attempt to the telecommunications termination point, an information and entertainment services selection and display system is caused to display a call alert indication to the user.

The detection means may be arranged to transmit a call signal to the server means, the termination point comprising  
15 a telephone handset having means for answering an incoming call attempt, and means for controlling the server means such that when the handset answers an incoming call attempt, the server means causes the display apparatus to cease to display the call alert indication.

The display means may include a video output device, and the server may be  
20 arranged to generate an overlay display for superimposition on other video images currently generated by the server.

Embodiments of the invention will now be described, by way of example with reference to the drawings, in which:

25 Figure 1 is a schematic diagram showing the functional relationships between the systems which co-operate to form the complete system;

Figure 2 is a more detailed schematic diagram of the network termination and associated card reading equipment, which for illustrative purposes will be assumed to be on board an aircraft;

30 Figure 3 is a diagram showing part of an alternative arrangement of network termination, arranged for co-operation with a cellular telephone handset;

Figure 4 is a schematic diagram showing the functional relationships between components of the fixed part of the first telecommunications system;

Figure 5 is a schematic diagram of the switching system, interface unit, and associated parts of the second telecommunications system;

5 Figure 6 is a flow chart showing the process by which a diversion is set up in the second network to a termination connected to the first network;

Figure 7 is a flow chart showing the process by which a call coming in to the second network is connected to a telephone connected to the first network;

Figure 8 is a flow chart showing the process by which the second network  
10 restores the original settings for a telephone when it disconnects from the first network.

Figure 9 illustrates the forwarding process implemented to a data message.

Figure 1 shows the general arrangement of the various components that co-operate in this embodiment of the invention. Note that traffic links (whether for  
15 speech or data) are shown as full lines, signalling links used only for call set up are shown as broken lines.

The onboard part 2 (shown in more detail in Figure 2) comprises a handset  
25 (or, in the alternative arrangement of Figure 3, the user's own cellular telephone handset 31), connected to a termination point 20 of the satellite network. The termination point 20 is in communication with a ground station 4, shown in more  
20 detail in Figure 4. In this embodiment, the communication link is made through an earth-orbiting satellite 6.

The principal components of the ground station 4 relevant to this invention are an antenna 44 which communicates, by way of the satellite 6, with the onboard  
25 system 2, an Access Control and Signalling Equipment (ACSE) 40 which carries out call switching functions to allow calls to be placed through the public switched telephone network (PSTN) 8 to other telephones 85, and a Card Management System  
42 which identifies and authorises the use of individual terminals 20. Associated with the card management system there is an "aircraft location register" 41 which  
30 monitors the terminals currently served by each individual satellite, and modifies the functioning of the card management system when a terminal 20, for example on board an aircraft 2, moves from the coverage area of one satellite 6 (and its ground

station 44) to another. There is also a register 43 of card identities, to provide a correspondence between the user identities used by the satellite terminal and the corresponding cellular telephone user identities (not necessary if the cellular telephone identity is read directly by the terminal 20, as will be described with reference to Figure 3), and to provide billing information.

The card management system 42 interacts with an interface unit 52 of a "host" cellular telephone network 5, shown in more detail in Figure 5. This network 5 is connected to the public switched telephone network (PSTN) 8, to other cellular networks 7, and to a data network 9, through a switching centre 50.

The cellular network 7 illustrates in simplified form the system architecture of a "GSM"-standard cellular radio system, and the terminology used in this standard. The network 7 has a switching system (MSC) 70 to allow connection of one or more base transceiver sites (BTS) 74, through one or more base site control systems 72, to the PSTN 8 and thus to other telephones 85. The cellular system is also capable of carrying data messages, for transmission over a packet data network 9, for example using the "SMS" ("Short Message Service") protocol which forms part of the GSM standard.

A mobile telephone 75 may establish radio contact with one of the base stations 74 in order to make and receive telephone calls. The network 7 also includes a "Visitor Location Register" 71, which maintains details of those cellular telephones 75 currently co-operating with the network 7. Mobile telephones according to the "GSM" standard are capable of co-operating with different networks ("roaming" between networks). To allow this to take place, when a mobile telephone 75 changes from one network to another, the network to which it has moved retrieves data from a "Home Location Register" 73 permanently associated with the handset 75. The network 7 in which the Home Location Register 73 associated with a given handset is to be found is identifiable from the handset's identity code. The Home Location Register also records the identity of the network 7 with which the mobile handset 75 is currently operating. Signalling between networks used for these functions, and at call set up, are also carried over the data network 9.

The "host" network 5 operates like conventional cellular network, but is provided with an interface unit 52, which interacts with the mobile switching centre

50 as a base site controller would. This interface unit 52 may be in addition to one or more base site controllers (not shown). The interface unit does not interact with any base transceiver sites or mobile handsets, but obtains user details (in particular the identity of a mobile handset) from the card management system 42 to allow it to  
5 appear to the switching centre 50, and the HLR 73 in the user's home network, that it is in radio communication with a mobile handset. It can then control the call forwarding instructions stored in the VLR 51, to cause incoming calls directed to that handset to be diverted, through the switching system 40 of the satellite network 4, to the satellite terminal 20.

10 Figures 2, 3 and 4 illustrate embodiments of the first network of the invention, applied to a satellite telephone system such as that provided by the applicant company under the Registered Trade Mark "Skyphone". Figure 2 shows a first embodiment of the mobile part for use with a standard card reader, whilst Figure 3 shows an alternative arrangement which allows a user to use his cellular telephone  
15 handset. Figure 4 shows the ground station.

The onboard system 20 shown in Figure 2 comprises a multiplex and radio interface unit 28, which is connected through respective seat interface units 220 to a plurality of user terminals 21 (only one shown in detail). The interface unit is also connected to an antenna 29 which provides radio communication with a satellite 6 or  
20 a ground station. Each user terminal 21 has a card reading unit 23 into which an intending user can insert a card 24 or other data carrier providing user identification data. The data may give details of the user's credit card account, or a special account for the use of the onboard telephone service. The card reader 23 may be adapted to read the SIM (Subscriber Identity Module) of a GSM-standard cellular  
25 telephone.

The user handset 25 provides the usual keypad, microphone and earphone to allow the user to make telephone calls. Each seat interface unit 220 is also connected to an onboard entertainment system 200 controlling the aircraft's in-flight entertainment system. The onboard entertainment system 200 comprises a plurality  
30 of servers 201-204, accessible using the keypad 25, which are arranged to deliver audio, visual, and interactive services such as games and shopping services, by way

of the seat interfaces 220, to individual user terminals 210, each provided with a screen 211 and a set of headphones 212.

The entertainment system 200 also has a connection 205 to the telephone interface unit 28 to allow the operation of an interactive server 203 which provides  
5 services such as on-line shopping services.

The user handset 25 and the card reader 23 are both connected to a processor 26 which converts data, which has been read from the card 24, and keystrokes which have been input from the handset 25, into data signals for transmission over the radio link 29. It also provides identification data indicative of  
10 which of the terminals 21 it is. A further processor 27 performs analogue/digital conversion of speech signals from the handset 25.

The digitised signals from each terminal 21 are multiplexed and modulated onto a radio carrier in the interface unit 28, and transmitted from the antenna 29.

The antenna 29 also receives signals, which are demodulated and  
15 demultiplexed in the interface unit 28. Data signals are processed in the processor 26, whilst digitised speech is converted to analogue speech in the analogue/digital convertor 27 and fed to the handset 25.

The interface unit 28 also includes a connection to the databus 22 of the aircraft 2 giving access to aircraft parameters such as "weight-on-wheels", time to  
20 destination, altitude, etc. When a predetermined condition indicative of the impending end of a flight is met, the central unit 28 transmits a signal to the ground station to cause a deregistration signal to be transmitted to the card management system 42.

Because the onboard telephone system was originally designed for making outgoing calls, the handsets 25 provided in existing terminals 21 are not equipped  
25 with a suitable call alerting device. The handsets 25 could be modified to provide a buzzer or light to alert the user to an incoming call, but this may be distracting to other passengers. However, this would require modification of the handset equipment itself. According to the present invention, the at-seat entertainment system 200, 210, 220 is adapted to alert the user, as will now be described. This arrangement  
30 requires minimal modification to the actual at-seat equipment.

When the interface unit 28 detects a "ringing tone" signal indicative of an incoming call attempt for a specified termination point 21, it transmits a control



signal, using the connection 205, to the audio/visual server 204 of the entertainment system 200. The ringing tone may be forwarded by the interface unit 28 to the server 204 to act as the control signal, or it may be terminated at the interface unit 28, a separate control signal being generated for forwarding to the server 204. The ringing tone may also be delivered to the handset 21 in the usual manner. The server 204 is arranged to respond to the control signal to generate a video and/or audio overlay for transmission to the headphones 212 or the screen 211 associated with the respective seat interface unit 220.

When the user responds to the alert by putting the handset in a condition to answer the call (going "off-hook"), an indication is sent to the interface unit 28 to connect the call through to the handset 21. The system is arranged such that this indication also causes the server 204 to cease giving the call alert indication. This may be achieved in one of the following ways.

The "off-hook" indication may be sent direct to the server 204 from the handset 21 by way of the seat interface 220. The server 200 then transmits a signal over the interface 205 to the telephone interface unit 28. The telephone interface unit 28 responds by transmitting an off-hook indication back to the ground station 4 and connecting the call to the handset 21.

Alternatively, the "off-hook" indication may be sent from the handset direct to the telephone interface unit 28, which connects the call to the handset 21 and transmits an "off-hook" indication back to the ground station 4. A control signal is sent over the connection 205 to the server 204 to cause the server to cease the "incoming call" display. This control signal may be the ceasing of the previous "ringing tone" signal.

In a third possible arrangement, the "off-hook" indication may be sent from the handset direct to both the telephone interface unit 28 and the server 204, which can each respond as indicated above without any further control signals needing to be sent over the interface 205.

Instead of the terminals 21, an alternative arrangement may be used as shown in Figure 3. In this arrangement each onboard terminal 21 is replaced by an onboard interface device 311 to which a user's own mobile radio telephone 31 can be connected electrically, thereby allowing the mobile telephone to be used without

using its radio antenna. It is a modification of the system described in the applicant company's International Patent Application WO97/36442, published on 2<sup>nd</sup> October 1997, to which the reader is referred for further details. In this modified version a GSM (Global System for Mobile communication) mobile telephone 31 comprises r.f. transceiver circuitry 32 coupled to an antenna 33, baseband signal processing and control circuitry 34, a rechargeable battery pack 35, a switch 36 and a socket 37. The processing and control circuitry 34 has a data output terminal coupled to both the r.f. transceiver circuitry 32 and a first contact 37a of the socket 37. A data input terminal 34b of the processing and control circuitry 34 is coupled to the r.f. circuitry 32 and a second contact 37b of the socket 37. A third contact 37c of the socket 37 is coupled to a control input of the processing and control circuitry 34. Fourth and fifth contacts 37d, 37e of the socket 37, which are respectively for 0V and +V power supply lines, power the telephone 31, and may also be arranged to recharge its batteries 35. The +V terminal of the battery pack 35 is also connected to the processing and control circuitry 34 and to an input terminal of the switch 36. The output terminal of the switch 36 is coupled to a +V input terminal of the r.f. circuitry 32. A control terminal of the switch 36 is coupled to an output of the processing and control circuitry 34.

A interface unit 311 comprises a control circuit 312, a user input unit 313, including a keypad and a display, a V.24 33.6 kbit/s modem 314, a power supply unit 315 and a plug 316. The plug 316 has five contacts 316a-316e which correspond to contacts 37a-7e of the socket 37 of the mobile telephone 31. The first contact 316a of the plug 316 is coupled to a data input terminal of the control circuit 312 and the second contact 316b of the plug 316 is coupled to a data output terminal of the control circuit 312. A bi-directional serial link 318 is provided between the control circuit 312 and the modem 314 for modem control and data signals. The third contact 316c and fifth contact 316e of the plug 316 are coupled to the +V output of the power supply unit 315. The fourth contact 316d of the plug 316 is coupled to the interface unit's 0V supply wiring. The user input unit 313 is coupled to the control circuit 312 for the input of user commands and the output of display control signals from the control unit 312 to the user input unit 313. The +V output of the power supply unit 315 is also coupled to +V input terminals 312a,

313a, 314a of the control circuit 312, the user input unit 313 and the modem 314. The modem 314 is coupled to a telephone line 317 and the power supply unit 315 is arranged to receive power from an electricity supply 319.

When the user wishes to connect to the interface unit 311, he connects the plug 316 of the interface unit 311 to the socket 37 on his telephone 31 by a cable (not shown). The voltage on the third contact 37c of the socket 37 is detected by the processing and control circuitry 34 which thereby determines that the telephone 31 has been connected to the interface unit 311. The connection of the battery 35 to the power supply 315 by way of the connections 37d/316d and 37e/316e also allows the battery to be recharged.

Once the processing and control circuitry 34 has determined that the telephone 31 has been connected to the interface unit 311, it sends a control signal to the switch 36, causing it to open, isolating the r.f. circuitry 32 from the battery pack 35 and the power supply 315 in the interface unit 311. The processing and control circuitry 34 also responds to the voltage on the third contact 37c of the socket 37 by selecting alternative control programs or constant data to allow for delays in the signal path from the telephone 31 to the controller 30 which are caused by the use of the satellite link 6 and the modems 314, 32.

In this arrangement, instead of the need for a separate card reader 23, the telephone 31 identifies itself to the telephone network 40/42 by generating its terminal identity code (IMSI in the case of a GSM telephone). The registration signal is not transmitted from the antenna 3 because the r.f. circuitry 32 is disabled. Instead, it is output to the interface unit 311 via the first contacts 37a, 316a of the socket 37 and plug 316.

The handset 31 may be designed such that ringing is inhibited when installed in the interface unit, or the user may switch ringing off manually, allowing call alerting to be carried out through the in-flight entertainment system 200, 210, 220 as already described.

The operation of the onboard system will now be described with reference to Figure 6. When the card reader 23 or interface unit 311 detects the presence of a card 24 or handset 31 respectively, (step 601) it may generate a prompt to indicate to the user that he may wish to have calls diverted to the onboard system. If the user

requires this service, he enters a code on the keypad of the handset 25, 31 which causes a divert request to be generated (step 602). The details from the card 23 (or SIM of the handset 31) are then passed to the processor 26, which also provides the identity of the terminal 21 (step 603) and transmits the data to the central unit 28.

- 5 The central unit 28 then transmits the data to the ground station 4 (step 604). The further steps (605-616) in the process are carried out by the co-operating networks 4, 5 and will be described later.

The user may decide that he no longer wishes to have his calls diverted to the terminal 21. In order to cancel the diversion instruction he may enter a special  
10 code on the keypad of the handset 25, 31. Disconnect codes may also be generated in the central unit 28 for all the termination points 21, either by the cabin crew or automatically in response to a signal detected on the aircraft's databus 22 which is indicative of the imminent end of the journey, such as weight on wheels, low altitude, or time remaining to destination as determined by the aircraft's flight  
15 management system. The disconnect instruction is transmitted (step 801) by way of the switching system 40 in the ground station 4, to the interface unit 52 whose operation (steps 802 to 805) will be described later.

The Ground Station 4 shown in Figure 4 has a radio antenna system 44 for communicating with the terminal 20, through a satellite link 6 or otherwise. Signals  
20 are handled by an Access Control Signalling Equipment (ACSE) 40 which carries out switching functions to route calls to or from the public switched telephone network (PSTN) 8. An aircraft location register 41 stores identification details for all aircraft 2 (and therefore all terminals 21) currently served by the ground station 4. When an aircraft passes into the control of a different ground station (or satellite in a satellite  
25 system) the aircraft location register in the second ground station acquires the aircraft details.

A card management system 42 comprises a data acquisition unit 44 which reads data transmitted from the card reader 24 to identify the type of card, confirm the user's account details and arrange billing for any calls made, through a billing  
30 system 45 which raises invoices, or interacts with the systems of a credit card operator or bank.

In the existing onboard systems a user cannot receive calls, unless the caller knows the unique "AES" number of the handset 20. This number depends on the identity of the aircraft, the seat, and the serving satellite or base station, none of which are likely to be known to the calling party.

5       The conventional ground station equipment just described is augmented in the present embodiment by a store 43, which stores a concordance between the card identities and the card-holder's cellular radio telephone number (MSISDN: mobile systems integrated services data network number), on request from the data acquisition unit, which is arranged to recognise the card identities which require such  
10 translation. This arrangement allows the existing card readers 23 to be used on board the aircraft, without modification. In a preferred embodiment the concordance is supplied to a register 43 in the ground station by the operator of the user's home network 7, when the network operator provides the user with the card. The operator of the home network 7 also records the concordance in its own Home Location  
15 Register 73. This may be done by manual data capture or by means of a data link (not shown) between the register 43 and the Home Location Register 73. If the terminal (e.g. 311) can read users' mobile subscriber identities directly, the store 43 can be omitted. Billing information is also returned to the user's home network 7.

20       The operation of the ground station will now be described with reference to Figure 6. The data acquisition unit 45 receives the card details from the reader 23 (see steps 601 to 604 already discussed) and if it identifies those details as corresponding to a cellular user (step 605), it retrieves the cellular user identity from the store 43 containing this concordance, or from the HLR 73 of the user's home network, (step 606). (This step can be omitted if the user's mobile network identity  
25 is read by the onboard apparatus 21).

30       A data transmission unit 46 then generates a signal indicative of the cellular user identity, together with the identity (directory number) of the terminal 21, for transmission, over the data network 9 or a dedicated link 99 (as shown), to the cellular network 5 acting as host to the interface (step 607). The host network 5 will, in general, not be the same as the user's home network 7. The further steps (608 to 616) in this process will be described later, with reference to Figure 5. For reasons to be explained later, a data network address identifying the at-seat entertainment

terminal 210 corresponding to the same seat as the terminal 21 is also provided by the data transmission unit 46.

If a cancellation signal is received from the aircraft in respect of a given terminal 20, (step 801) the data transmission unit 46 transmits a "cancellation" signal to the host network 5. As already discussed, the cancellation signal may be generated either for an individual handset 21, by its user dialling a special code, or for all handsets as the result signals received by the radio interface unit 28 over the aircraft's databus 22 indicative of the imminent end of the flight.

An embodiment of the host network 5 of the invention is shown in Figure 5. Its operation will be discussed with reference to Figures 6, 7 and 8. In this network 5 an interface unit 52 is provided, which is arranged to appear to the switching system 50 as if it is a normal base station of the cellular radio system.

In order to do this, the interface unit 52 is provided with a data acquisition unit 54 which receives from the card management system 42 of the ground station 4 the identity of the cellular telephone it is to represent, and the AES identity of the onboard terminal 20 (step 608, Figure 6). Mobile telephones have two identification codes: the directory number (MSISDN) and the actual SIM identity (IMSI). In practice, for security reasons, the IMSI is not made generally known, and a user is identified by his MSISDN unless the SIM itself is used. Therefore, unless the SIM is used in the card reader 23, or the user's telephone is used in the arrangement of Figure 3, (in which case no concordance is required) the data acquisition unit 54 will receive the MSISDN, and not the IMSI.

However, the GSM standard does allow a switching system to obtain an IMSI from the Home Location Register 73, given an MSISDN. This facility is provided in order to obtain routing information for data messages, which cannot be sent over the public switched telephone network (PSTN). To do this, the interface unit 52 transmits a "request for routing information" for the user's MSISDN (step 609). The HLR 73 responds to such a request with a signal which includes the IMSI corresponding to the MSISDN in the request (step 610).

The telephone identity (IMSI), whether obtained directly from the card reader 23 or handset 31, or indirectly as just described, is passed to a network registration unit 55 which exchanges signals with the mobile switching centre 50 in the same

way that a real cellular telephone would do. The mobile switching centre therefore informs the user's Home Location Register 73 that the mobile telephone is now registered with the network 5 (step 611). The Home Location Register 73 records that the mobile handset is now registered with host MSC 50 (step 612).

5           It should be noted that, although registered with the host MSC 50, the user's mobile handset is not operatively connected to the host MSC 50 – indeed, the mobile handset may be switched off to allow the card 24 to be used, or it may be connected to a user terminal 311. The user may be in an aircraft, anywhere in the world within the coverage area of the network of satellites 6.

10           The user's details, including any diversion instructions, are sent by the Home Location Register 73 to the network's VLR 51 (step 613). A store 57 records a copy of the details of these diversion instructions (step 614).

Conventionally, any incoming calls for a mobile user are sent in the first instance to the user's home network 7, and the HLR 73 provides information to  
15 identify the MSC 50 where the mobile handset can currently be found. Consequently, in the present arrangement, any incoming calls intended for the mobile user will now be directed to the network 5, as the mobile user is currently registered there.

The data acquisition unit 54 in the interface 52 now passes the directory number of the termination point 21 to a call diversion instruction unit 56, which  
20 generates a "divert on busy" instruction to the VLR 51 (step 615). This is a standard divert arrangement, and operates such that should the mobile unit appear to be engaged on another call when a call attempt is made to it, the call attempt is diverted to a specified directory number, in this case the termination point 21. This diversion instruction replaces any previous instruction held in the VLR 51.

25           Of course, there is in fact no mobile telephone connected to the interface unit 52, and therefore it is unable to connect incoming calls to the mobile telephone in the conventional way, or to identify the current true operating condition (switched off, busy, ready for calls, etc) of the mobile handset. Instead, the system responds to a call attempt as will now be described with reference to Figure 7.

30           When a call attempt is made (step 701), the home MSC to which the call is initially routed obtains from the HLR 73 the current location of the mobile telephone (step 702), and on receiving the identity of the host MSC 50 (step 703), directs the

call there (step 703). The host MSC 50 in turn transmits the call attempt to the currently serving base station, which is in fact the interface unit 52 (step 704). If the disconnect procedure (to be described later with reference to Figure 8) has been carried out, the call will fail (step 705) and a signal is transmitted back to the home  
5 MSC 70. Otherwise, call attempts received by the interface unit 52 are handled by a call request handling unit 56, which automatically returns a "busy" signal to any such request (step 706). The MSC 50, on receiving the "busy" signal, checks whether any incoming call currently in progress to that mobile handset has already been diverted (step 707). (This is a standard procedure, to ensure that the call diversion will  
10 actually succeed). If there is no such diverted call in progress, the MSC 50 retrieves the diversion information from the VLR 51 (step 708) allowing it to route the call through the PSTN 8 to the user terminal 21 (step 710).

If a second call attempt is made, the MSC 50 will identify that the divert instruction will not work as it is currently handling a diverted call to that number  
15 (step 707). The normal default condition in such cases is to arrange for the second call to be diverted to the user's voicemail address (not shown) in his home network 7, (step 709, 710). The user is also sent a data message (in SMS format) to inform him of the new voicemail message. This message would normally be sent to the mobile unit, which appears to the MSC 50 to be co-operating with the interface unit  
20 52, so the MSC 50 transmits the data message to the interface unit 52 (step 711).

In order to inform the user of the new voice mail message, the interface unit 52 must now forward the data message to the user terminal 21 (step 712) either during the call or after it ends. However, data messages are not suitable for switching via the MSC 50 and PSTN 8, nor for handling by the on-board terminal 21  
25 as it is only equipped for voice. Because the IMSI is recorded in the HLR 73 as being registered with the "Virtual" BSC, or interface unit, 52, any other data messages intended for the user will also be routed to the interface unit 52, and require forwarding to the user. In order to forward such messages, the interface unit 52 is provided with a data handling processor 53 for receiving data messages received  
30 over the packet data system 9 by way of the MSC 50 and intended for users currently associated with the interface unit 52. These messages include SMS messages sent from other callers, and SMS messages generated by the MSC 50



itself to alert the user that a message has been sent to the voice mail system. The format of such a message is shown in Figure 9. The message basically consists of a data payload 901 and an address 902, which is the IMSI of the destination mobile telephone (figure 9a).

5           The interface unit 53 retrieves from the data acquisition unit 54 the data network address of the at-seat entertainment terminal 210 corresponding to the user's cellular identity which was originally provided to the data acquisition unit 54 when the user carried out the registration procedure. It then replaces the address header (the IMSI) 902 with a code 912 identifying the terminal 210 and encapsulates  
10 the message in a form suitable for transmission over the packet data network 9 to the aircraft, with an address header 910 to send it to a data network interface 202 of the onboard entertainment system 200. It can thus be transmitted to the data interface 202 over the packet data network 9, effectively as a packet with an address header 910 and a payload made up of the at seat terminal number 912 and  
15 true payload 901 (Figure 9b).

On receipt of the data message, the data server 202 extracts the data message payload 901, 912, (Figure 9c) and identifies the individual at-seat terminal 21 identified by the address 912. It can then activate the video display server 204 to display the data message payload 901 on the appropriate screen 211.

20           If password protection is required, for example to ensure that the user is present when the message is displayed, the payload 901, 912 can also include a password code 913, which causes the server 202 to withhold the remainder of the payload until a predetermined sequence of keystrokes has been entered by the user in the terminal 21.

25           As the termination 21 is itself mobile, being on board an aircraft, call routing to that termination may require revision from time to time. For example, the "Inmarsat" satellite system comprises five geostationary satellites, which each provide cover for part of the earth's surface. These areas of coverage overlap to a large extent, but nevertheless on a long flight the aircraft may pass out of the area  
30 covered by one satellite into that served by another. This causes a small but significant change in the network address of any terminal 21 on board the aircraft. The aircraft location register 41 monitors the identity of all aircraft currently being

handled by the ground station 4. When it acquires a new aircraft, it instructs the card management system 42 send an instruction to the interface unit 5 in the host network. The call diversion instruction unit 56 responds by transmitting a new call diversion instruction to the VLR 51, so that any further incoming call attempts are  
5 diverted to the new network address of the terminal. Note that the diversion store 57 is not updated. Note also that this does not affect calls already in progress. There is usually sufficient overlap in coverage areas that handover from one satellite or base station to another can be arranged to take place when no call is in progress.

Since the system causes the generation of an IMSI from the interface unit  
10 52, instead of from the mobile telephone to which that IMSI relates, the mobile telephone should be switched off, or connected to an onboard interface device 311 which disconnects the radio circuits, to prevent the network detecting the IMSI in two places, which would disrupt the call routing processes in the HLR 73 and elsewhere. (Generally, the detection of the same IMSI from two sources causes the  
15 HLR 73 to disconnect both callers as a fraud prevention measure). If the user is on board an aircraft, he should not be using his mobile handset in the conventional manner, and so there should be no problem. However, if the user, having left the aircraft, switches on his telephone 75 when the network 5 has not reported a loss of the mobile unit from its own network, the mobile unit may be perceived by the HLR  
20 73 as being registered with two networks at once. To avoid this possibility, a disconnection procedure is followed as described with reference to Figure 8.

To stop calls being diverted to the user termination point 21, and restore the original call diversion settings, a disconnection signal is transmitted from the user terminal system 20 to the card management system 42 and thus to the interface unit  
25 52 (step 801). The disconnection signal may be activated by a special code entered by the user, or it may be generated automatically by data indicative of the imminent end of the flight. Note that this disconnection signal merely controls the interface 52 – it has no effect on any call already in progress, which is routed from the MSC 5 by way of the PSTN 8.

30 The disconnect instruction is received by the interface unit 52 (step 802) and causes the call diversion instruction unit 56 to retrieve the call diversion data stored in the store 57 (step 803) and generate a call diversion instruction restoring the

original settings in the VLR 51 (step 804). This ensures no further calls are routed to the onboard terminal 21. I

The interface unit 52 next causes the network registration unit 55 in the interface unit 5 to instruct the MSC 50 that the user is no longer connected to the network 5 (step 805). This allows the mobile unit to register with another network 7 in the normal way. Call attempts to the user number will continue to be routed by the Home HLR 73 to the MSC 50 with which the mobile unit was most recently registered, but as the MSC cannot now find the mobile unit, any such incoming call will return a "not found" signal to the home MSC 70 (step 705) which will divert the call according to any diversion instructions set up, or fail the call. Alternatively, the host MSC 50 may handle the diversion itself if the mobile unit is "not found", using the original diversion instructions now in the VLR 51, having been retrieved from the store 57 (step 804 above).

Having left the aircraft, the user may switch on his mobile telephone 75, which will register with the local network (e.g.7) and will retrieve the original divert information from the HLR 73 (note that in general the HLR 73 will not be in the same network), and will cause all data relating to the user to be deleted from the VLR 51 in the "host" network 5.



## CLAIMS

1. Telecommunications apparatus for answering telephone calls, the apparatus comprising:

5 detection means for detecting a call signal indicative of an incoming call attempt to a telecommunications termination point,

an information display system for providing information and entertainment services to a user, the information display system comprising  
a display means and

10 a server for selecting information and controlling the display means to display the selected information;

the server having means responsive to the detection means for causing the display apparatus to display a call alert indication.

15 2. Apparatus according to claim 1 wherein the detection means is arranged to transmit a call signal to the server means, the termination point comprising a telephone handset having means for answering an incoming call attempt, and means for controlling the server means such that when the handset answers an incoming call attempt, the server means causes the display apparatus to cease to  
20 display the call alert indication

3. Apparatus according to claim 1 or 2 in which the display means includes a video output device.

25 4. Apparatus according to claim 3 in which the server is arranged to generate an overlay display for superimposition on other video images currently generated by the server.

5. A method of alerting a user of a telecommunications termination point to an incoming call attempt,  
wherein on detection of a call signal indicative of an incoming call attempt to the telecommunications termination point, an information and entertainment services  
5 selection and display system is caused to display a call alert indication to the user.
6. Method according to claim 5 wherein when the incoming call attempt is answered by an associated telephone handset, it transmits a signal which causes the information and entertainment services selection and display system to cease to  
10 display the call alert indication.
7. Method according to claim 5 or 6 in which the display means includes a video output device.
- 15 8. Method according to claim 7 in which an overlay display indicative of an incoming call attempt, is generated for superimposition on other video images currently displayed on the display means.

## ABSTRACT

Call Diversion System

5        An interface (52) is provided between a satellite telephone system (4) and a cellular telephone system (5) for allowing calls to a user's cellular telephone to be diverted to a satellite telephone handset (25) when the user is unable to use his cellular telephone, for example when on board an aircraft (2) fitted with a satellite telephone system (20). The user inserts a card (which may be the SIM of his mobile  
10    phone, or a card compatible with existing satellite telephone equipment) into a suitable reader in the satellite telephone (20), which causes the satellite ground station's card verification system (42) to connect to a host cellular network (50).

      The host cellular network has an interface unit (520 which emulates the operation of a normal base station, so that the host cellular system (50) acts as if the  
15    mobile user's terminal is roaming on the host network, but is currently "busy". The interface (52) also resets the user's existing call diversion instructions so that when the host cellular system (5) receives a busy tone from the base station emulator (52), it routes calls to the directory number of the terminal (20).

      A method of alerting a user of a telecommunications termination point to an incoming  
20    call attempt,

      On detection of a call signal indicative of an incoming call attempt to the telecommunications termination point, an information and entertainment services selection and display system is caused to display a call alert indication to the user.

25


Figure 1



1





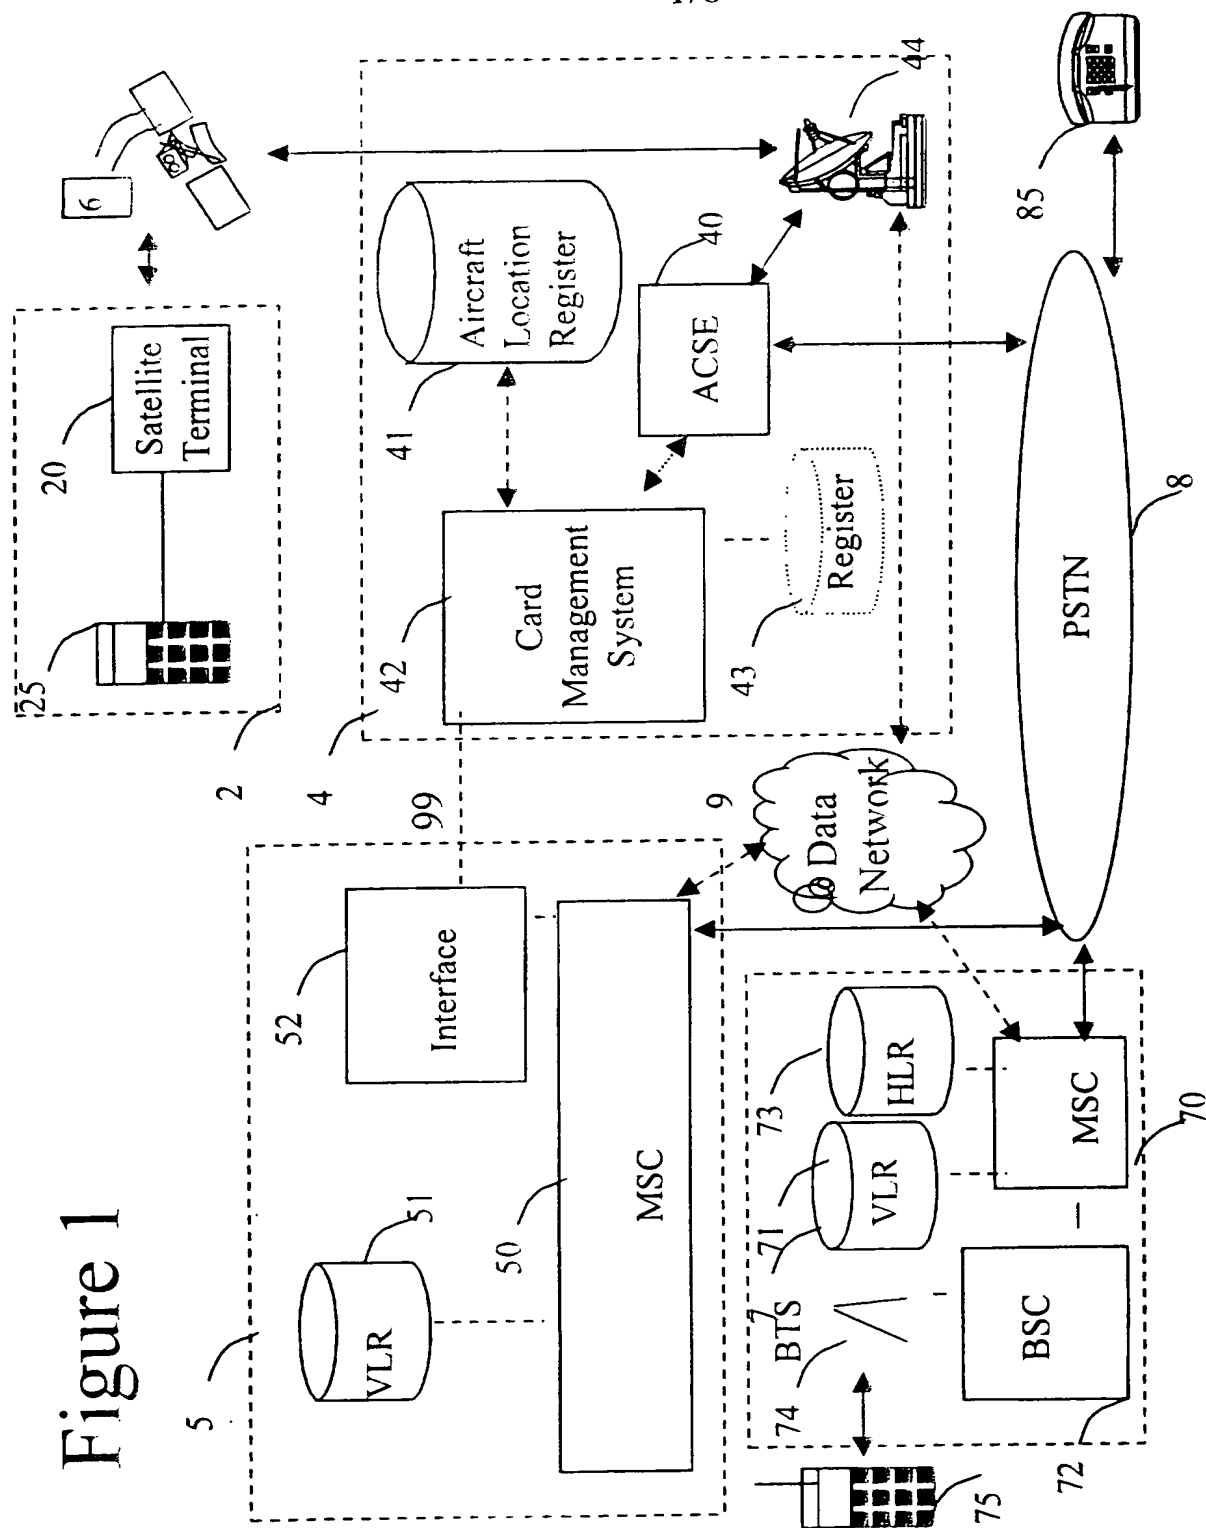

2/8


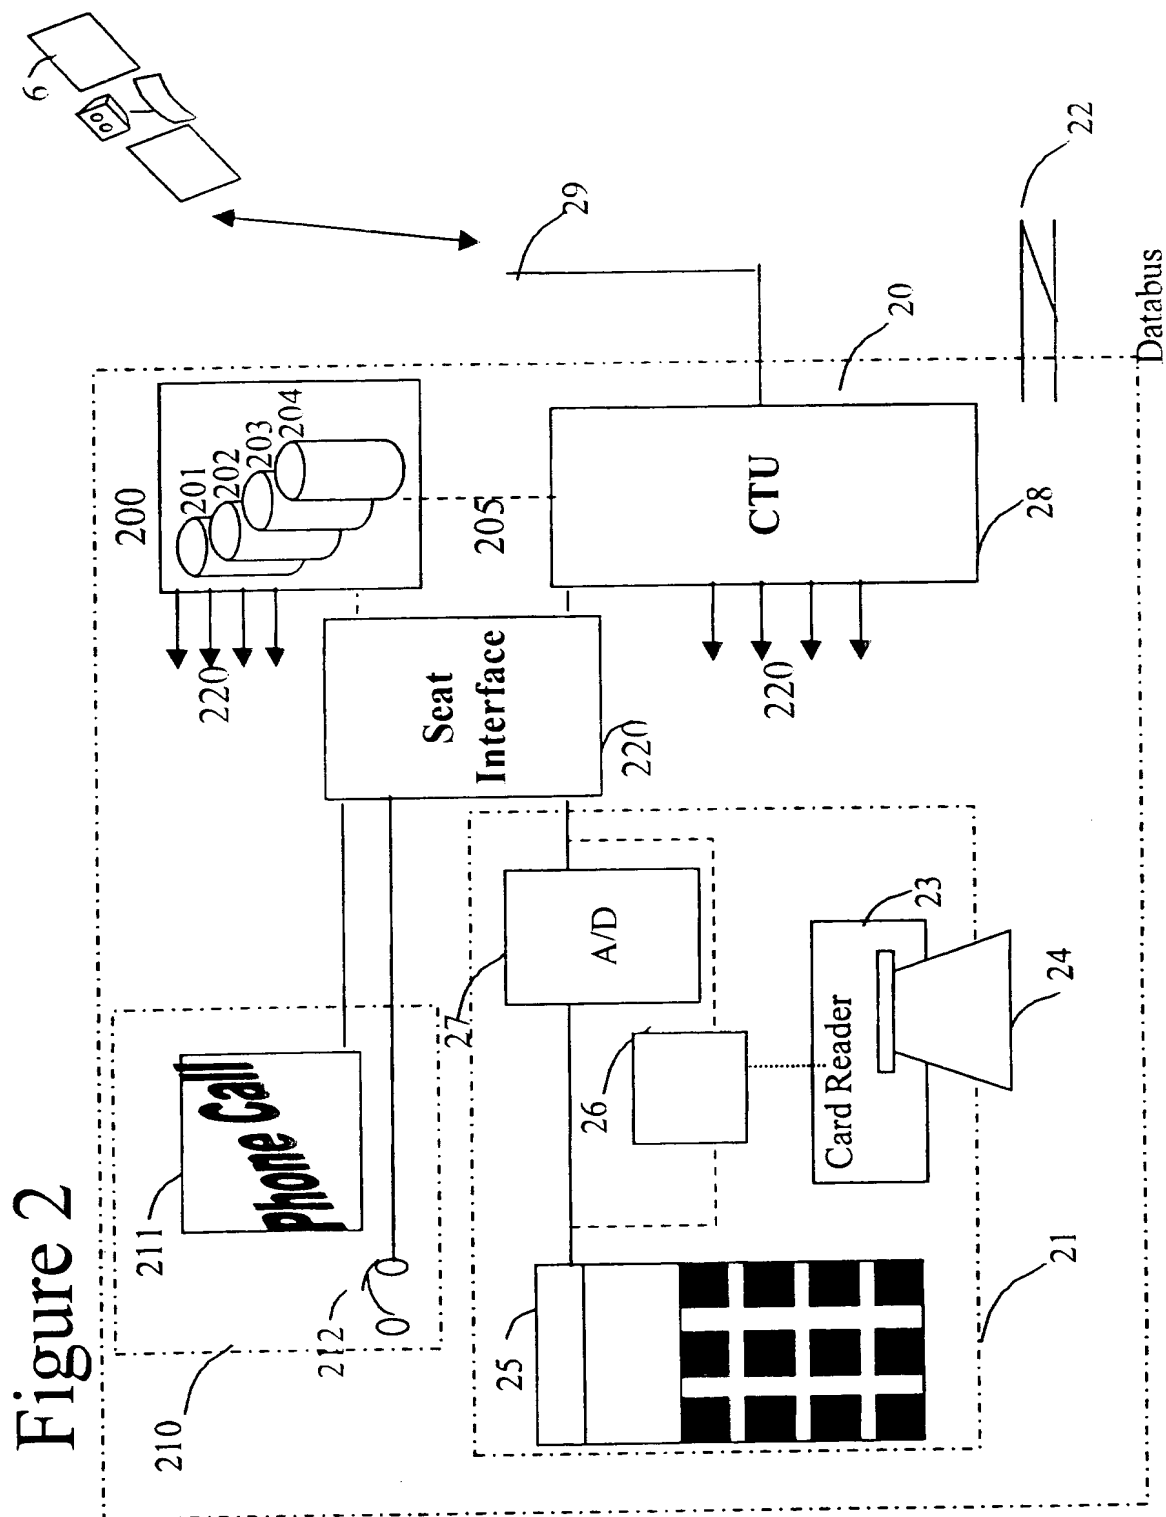


Figure 3

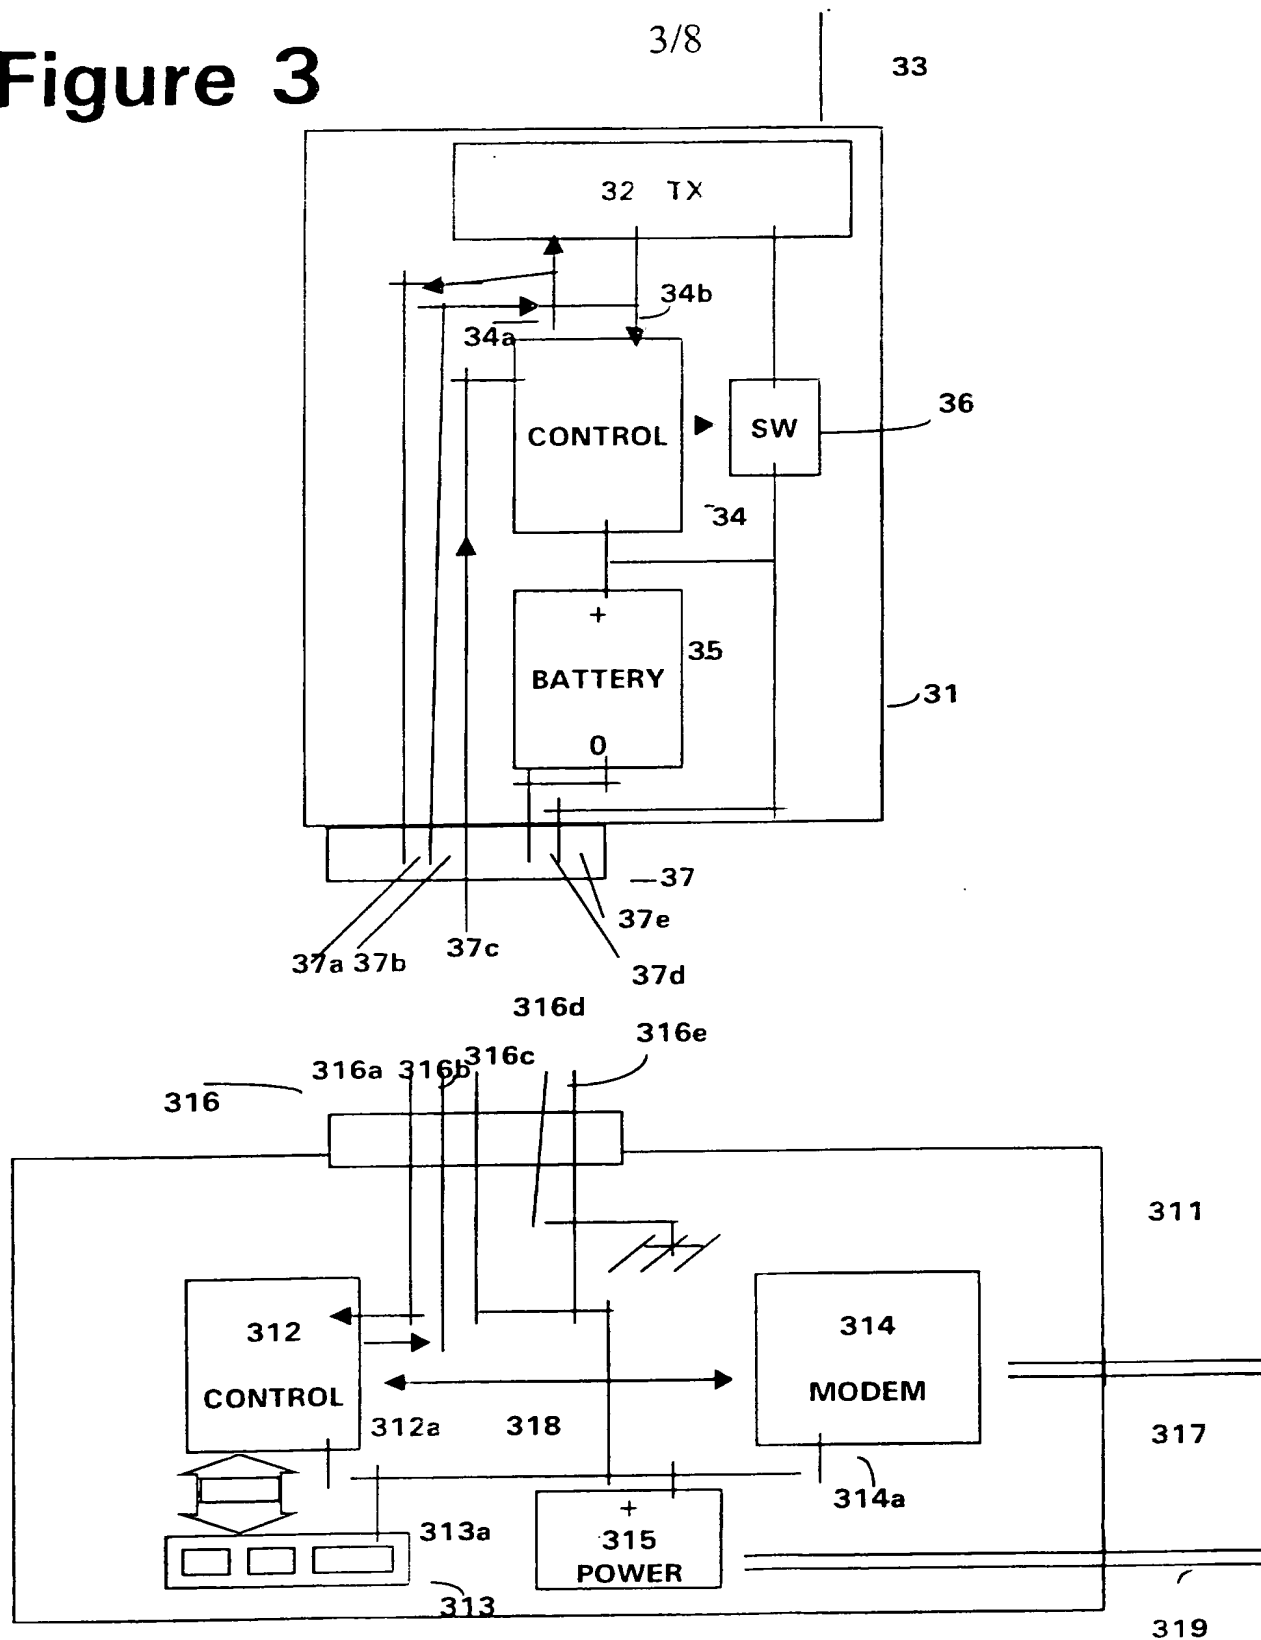

4/8


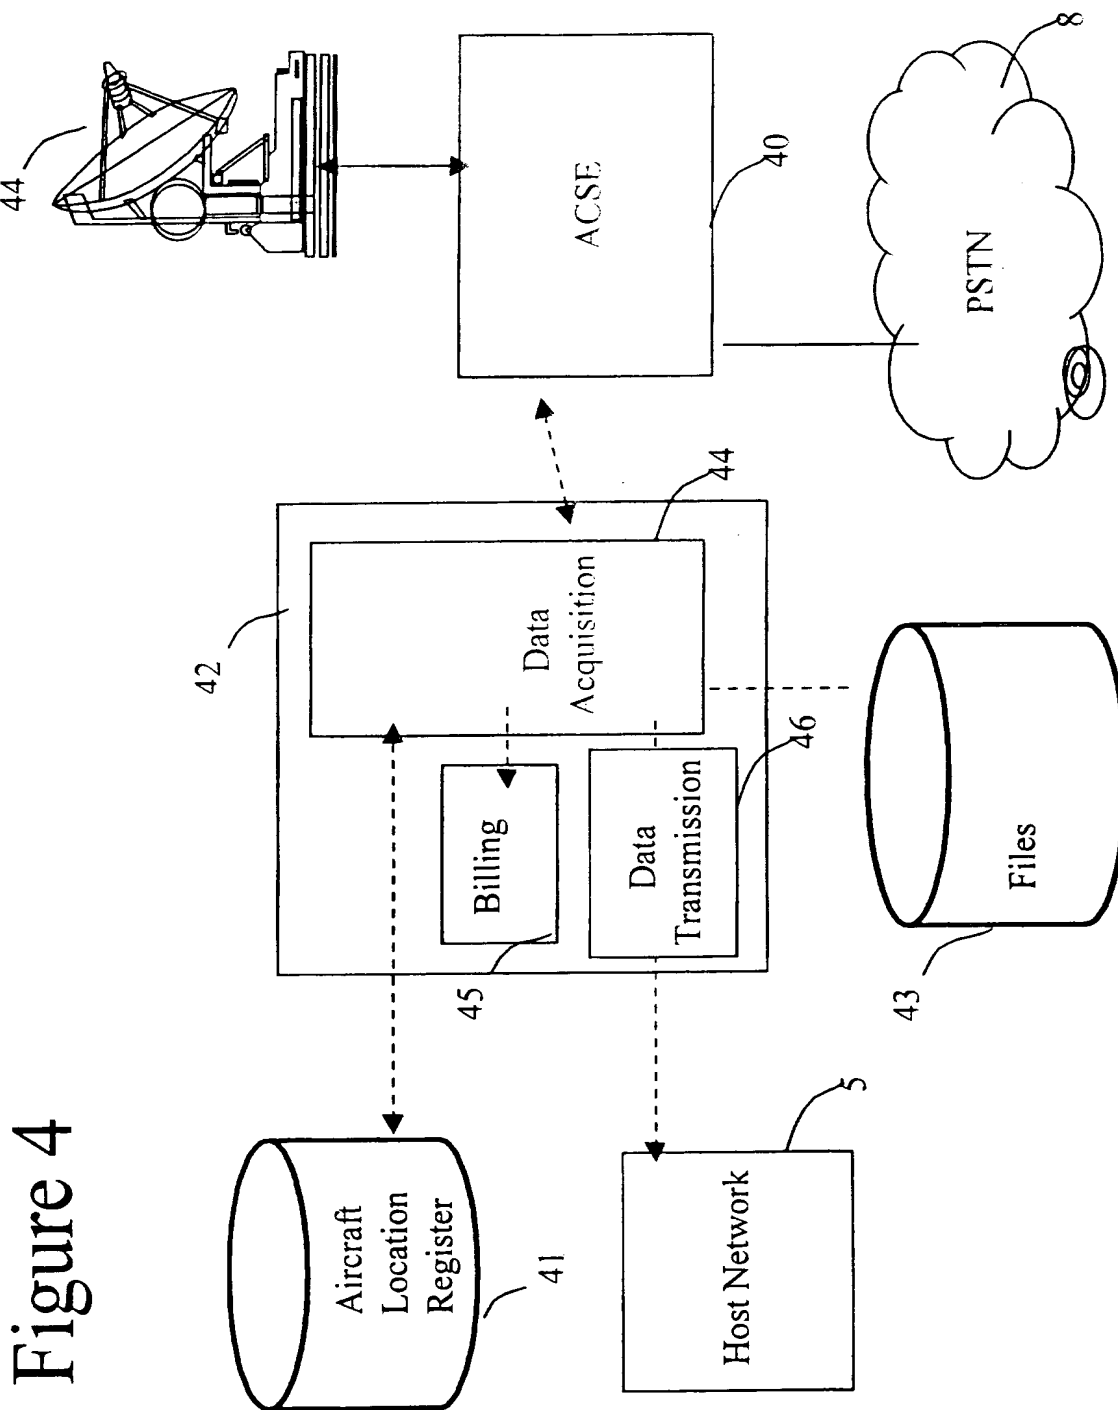


Figure 4

5/8

Figure 5

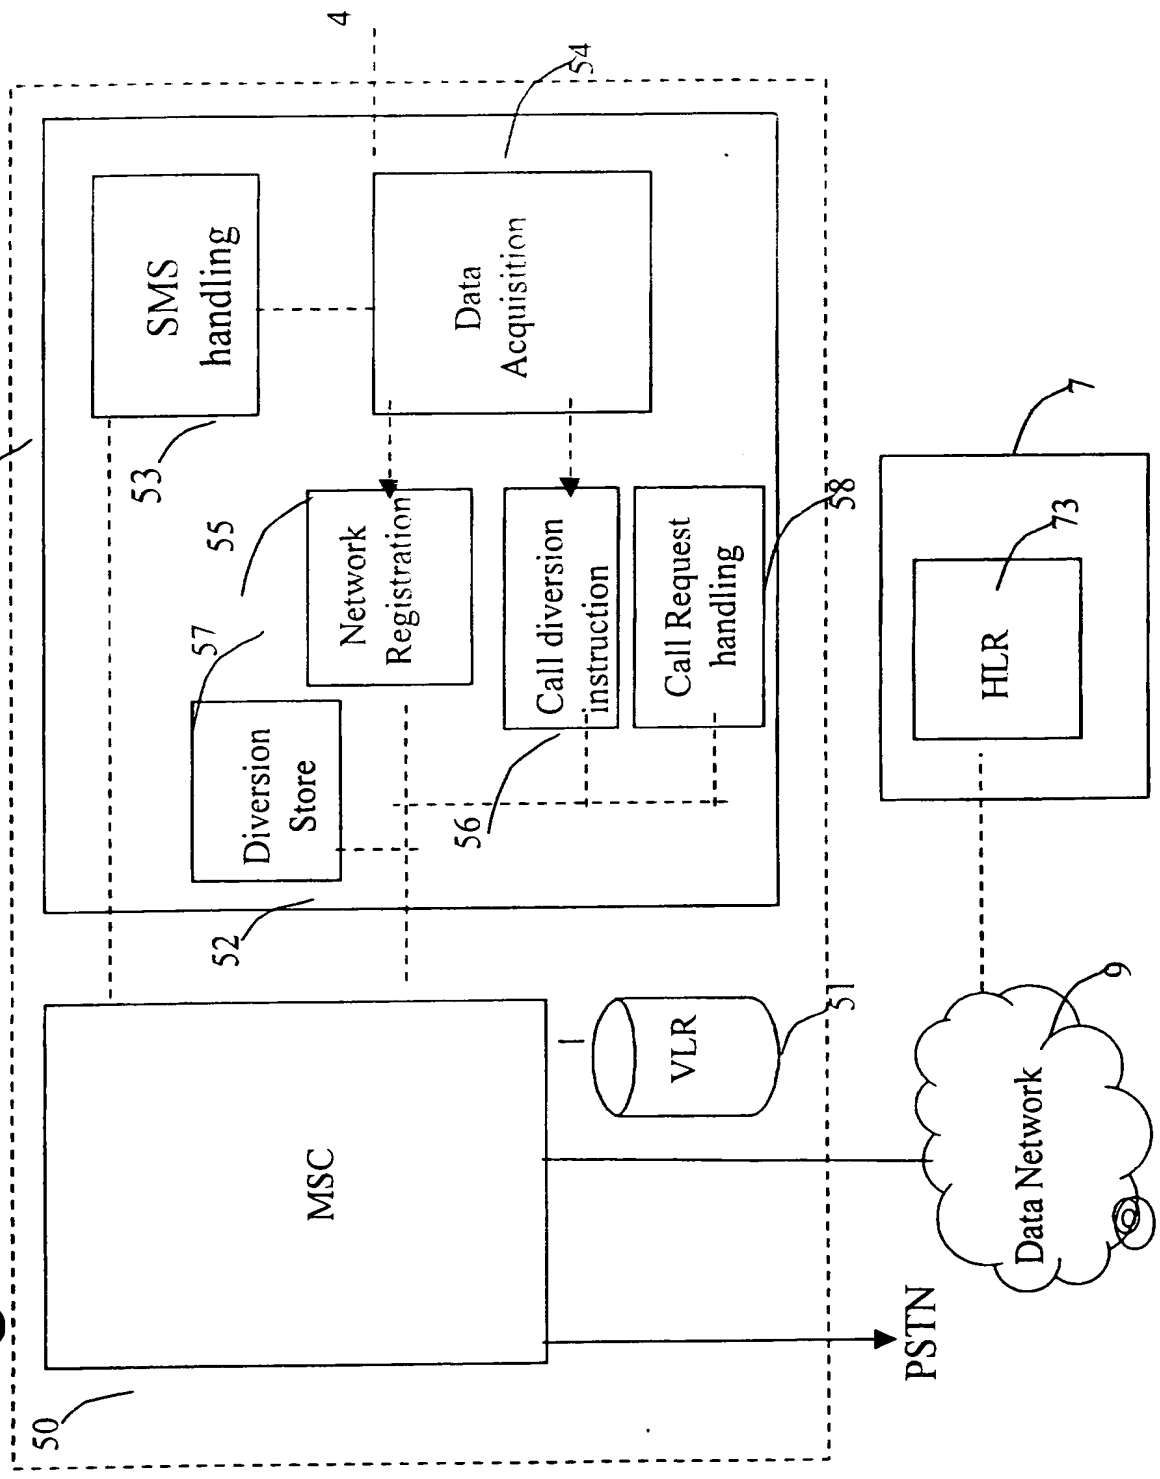

6/8

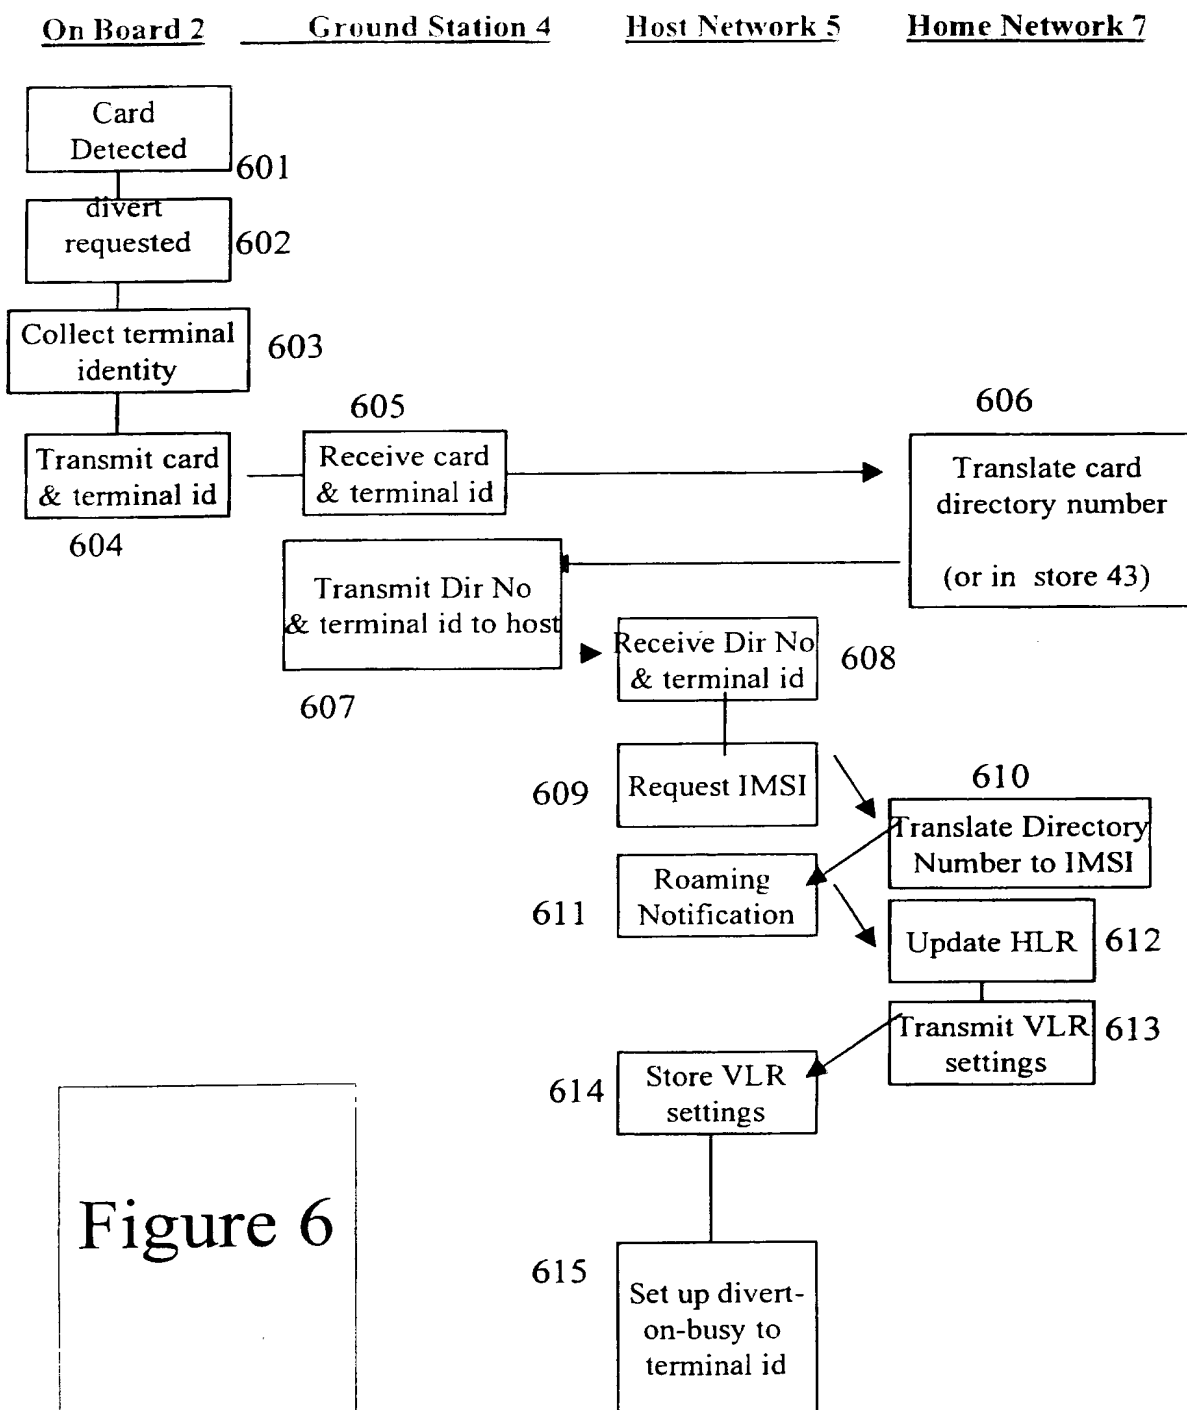


Figure 6

7/8

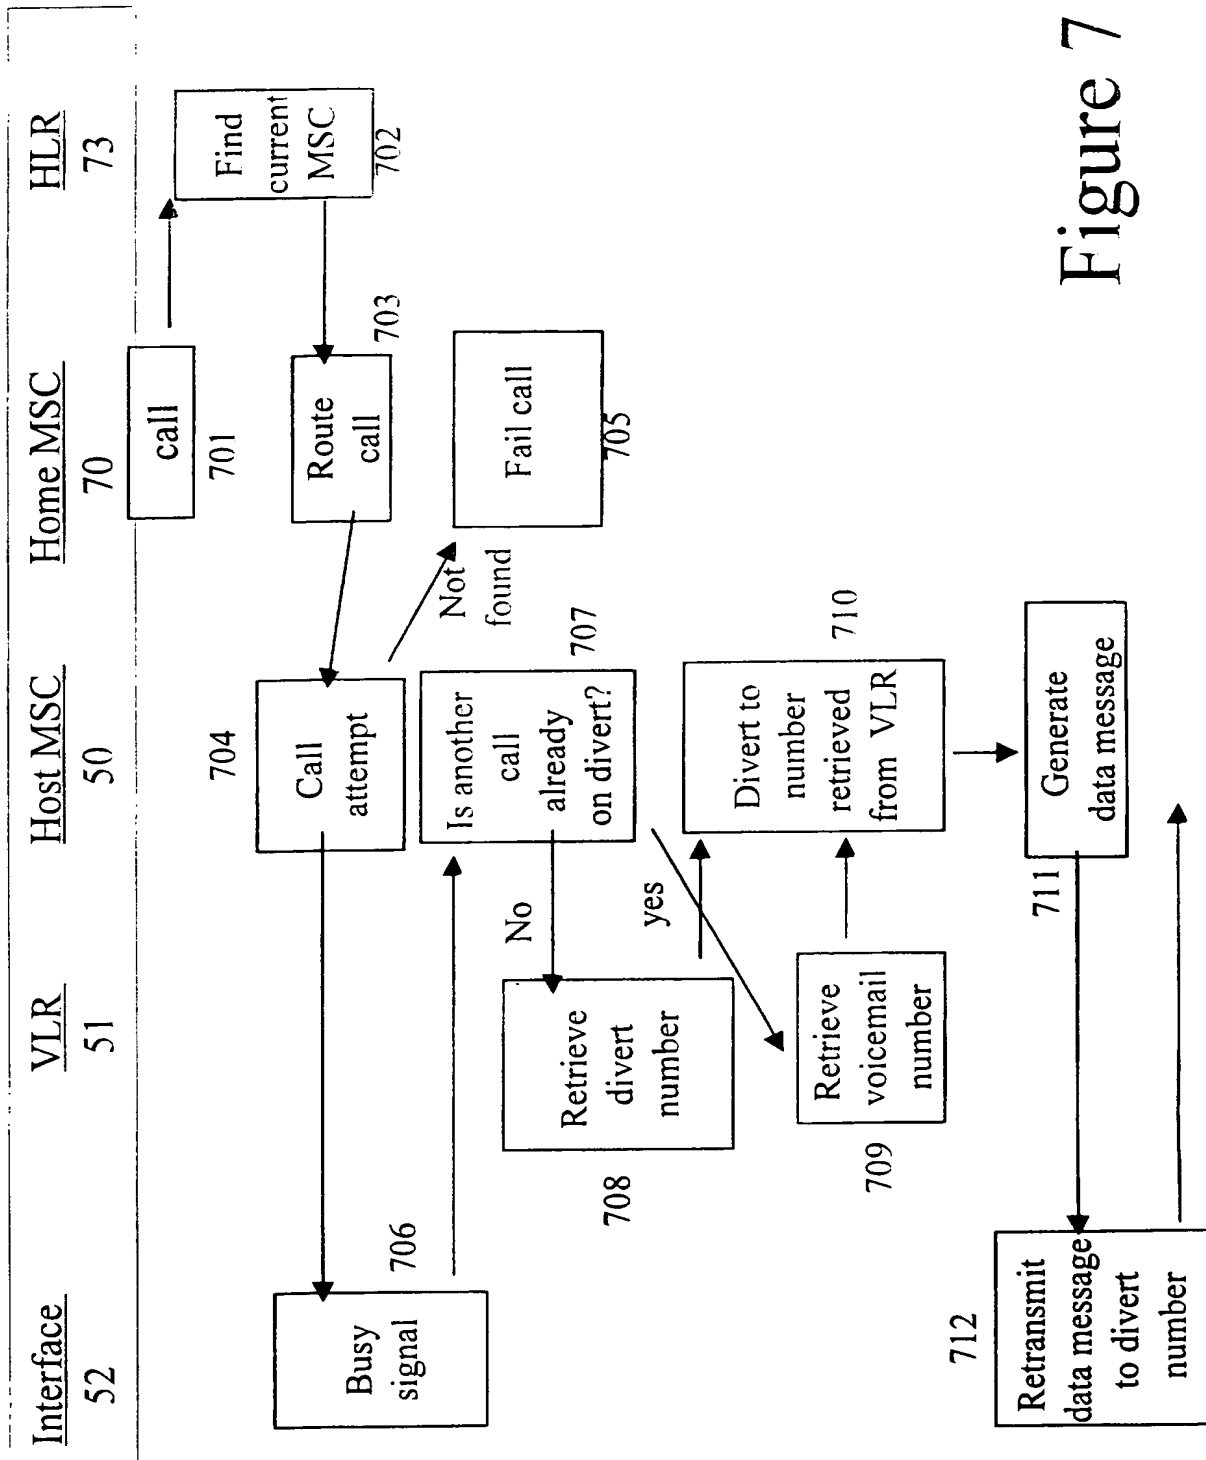


Figure 7

Figure 8

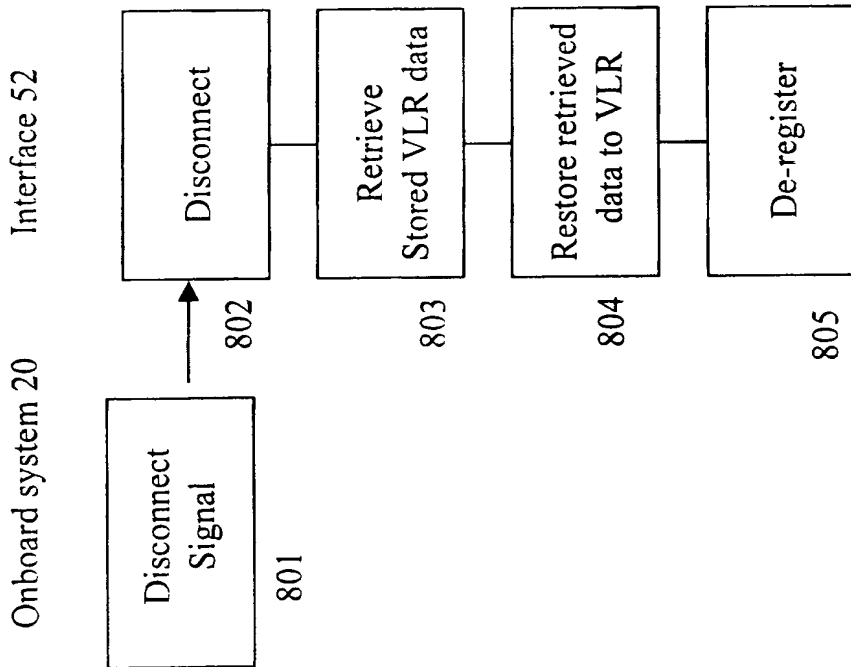


Figure 9

